


IF IN DOUBT ASK

ALL DIMS IN mm UNLESS STATED OTHERWISE

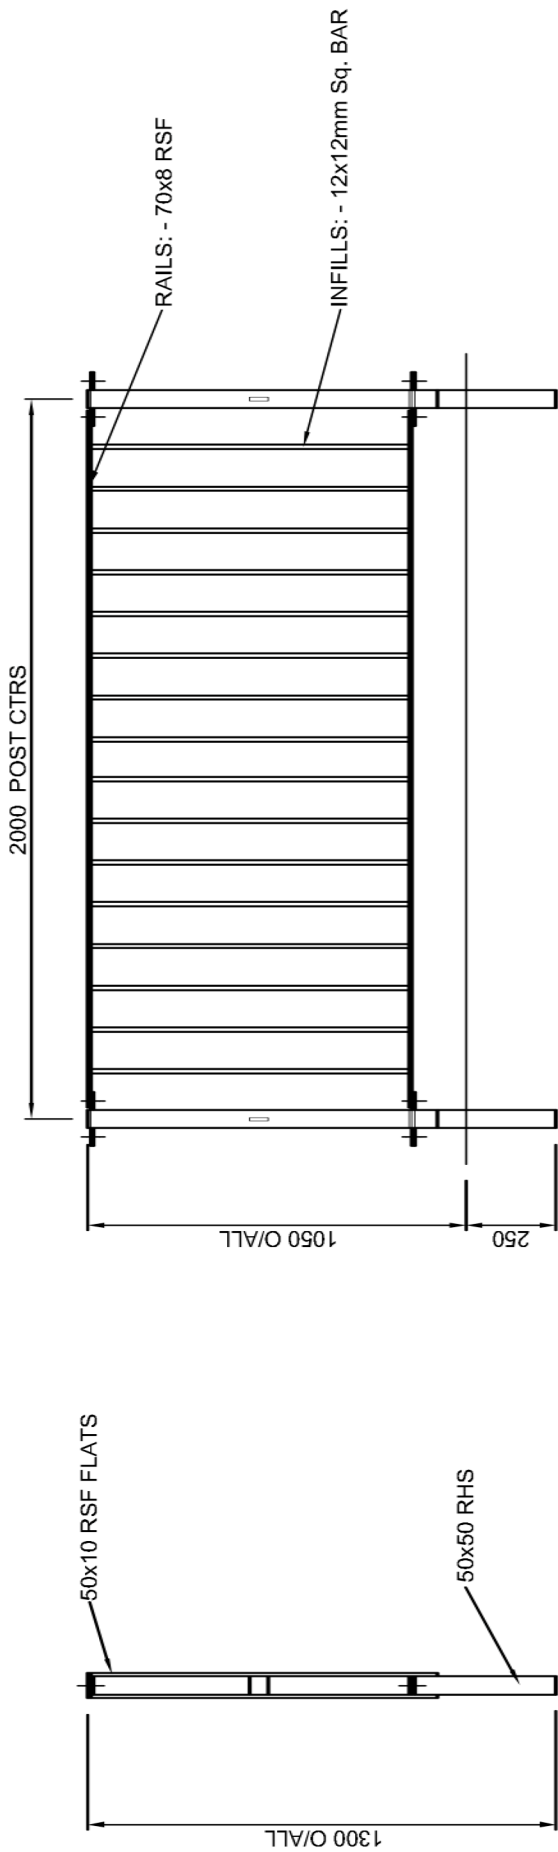

TYPE V2

OPTIMUM SIGHT ANGLE 2.5° TO 5°
FOR USE ON STRAIGHT ROADS
MODERATE TO HIGH SPEEDS



TYPE V4

OPTIMUM SIGHT ANGLE 5° TO 14°
FOR USE ON STRAIGHT ROADS
LOW TO MODERATE SPEEDS & CURVES



TYPE V8

OPTIMUM ANGLE MORE THAN 14°
FOR USE ON CURVES LESS THAN 15m RADIUS



NOTES

- 1. STEEL TO GRADE S275 JOH - BS EN 10219
- 2. ALL WELDS TO BE IN ACCORDANCE WITH BS EN 288-3
- 3. DESIGN AND CONSTRUCTION TO BS 7818

QUANTITY	REV DESCRIPTION	DATE	INIT
RELEASE MARK	TITLE STANDARD DETAIL OF ALL TYPES OF OPTIRAILS		
	PROJECT STANDARD DRAWINGS		
	DRAWING NO	DATE	REV
	W/O	DRAWN	CHECK
		C.U.	D.B.
			JUL 08
			SCALE: A1/A3
			STD OPTIRAIL